



Ørsta Bridge Parapet

www.vikorsta.no

Ørsta Bridge Parapet has been full scale tested in accordance with NS-EN 1317 in containment class H2 and working width W2.

The railing has a round, soft design that also provides good protection against damage.

Ørsta Bridge Parapet is supplied in several versions to suit the individual project

Supplied for assembly on bolt groups with::

- Distance between centres 2000 mm.
- Distance between bolts c/c=140X140 mm.
- M20 Bolts.
- Can be adapted for various fastening methods.
- Can be adapted for various fastening heights.
- Can be supplied in various heights (e.g. H=1,4m).

Technical data:

Containment class:	H2
Working width:	W2
Post interval:	2m
Damage class:	B
Tested in accordance with:	EN-1317


a **SAFEROAD** company

DUBLIN OFFICE


MOTORWAY CARE Crofton House Unit 5 Greenhills Ind Est Walkinstown Dublin 12 IRELAND
Tel + 353 1 4569888 Fax + 353 1 4569898 Mobile + 353 87 2597087




Type BR1

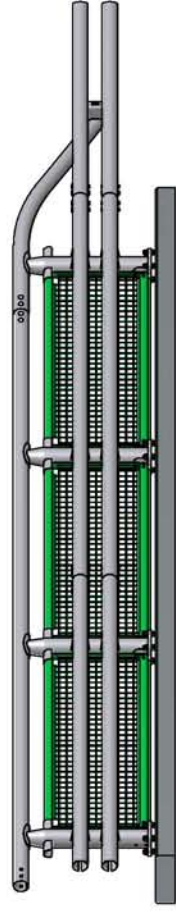


Type BR3/Snowplough safe

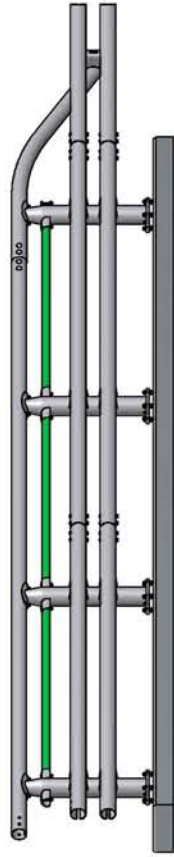


Type BR2

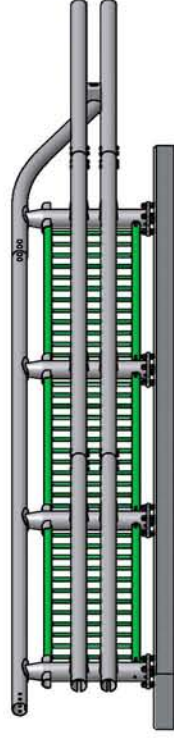

Type BR3/Picket

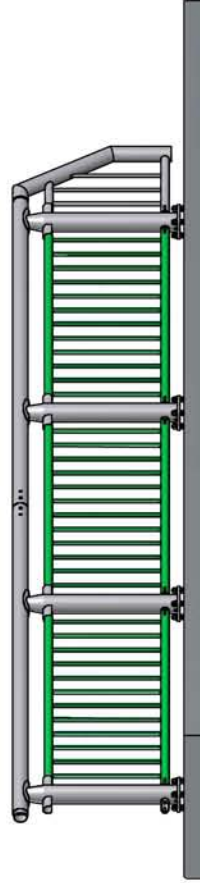

Type BR4

Date 28.04.2009		Konstr./Tegnet SHumbertset	Målestokk A3 - 1:40	
Beregning		Godkjent	Erstatning for	
System drawing Ørsta Parapet			Erstatning for	
Henvising:			Erstatning for	
C: Mulardesign/Heringsøyve/Ørsta Parapet.dwg			5	
			6	



Ørsta Bridge Parapet

Revisjon
Denne tegning er vår eiendom og må ikke, uten vårt samtykke, brukes, kopieres eller motvære interesser tilgjengelig for andre